


MPA-95 SOLID-STATE PUBLIC
ADDRESS AMPLIFIER
SHEET # 1 (320-2036)
FAXBACK DOC # 11434

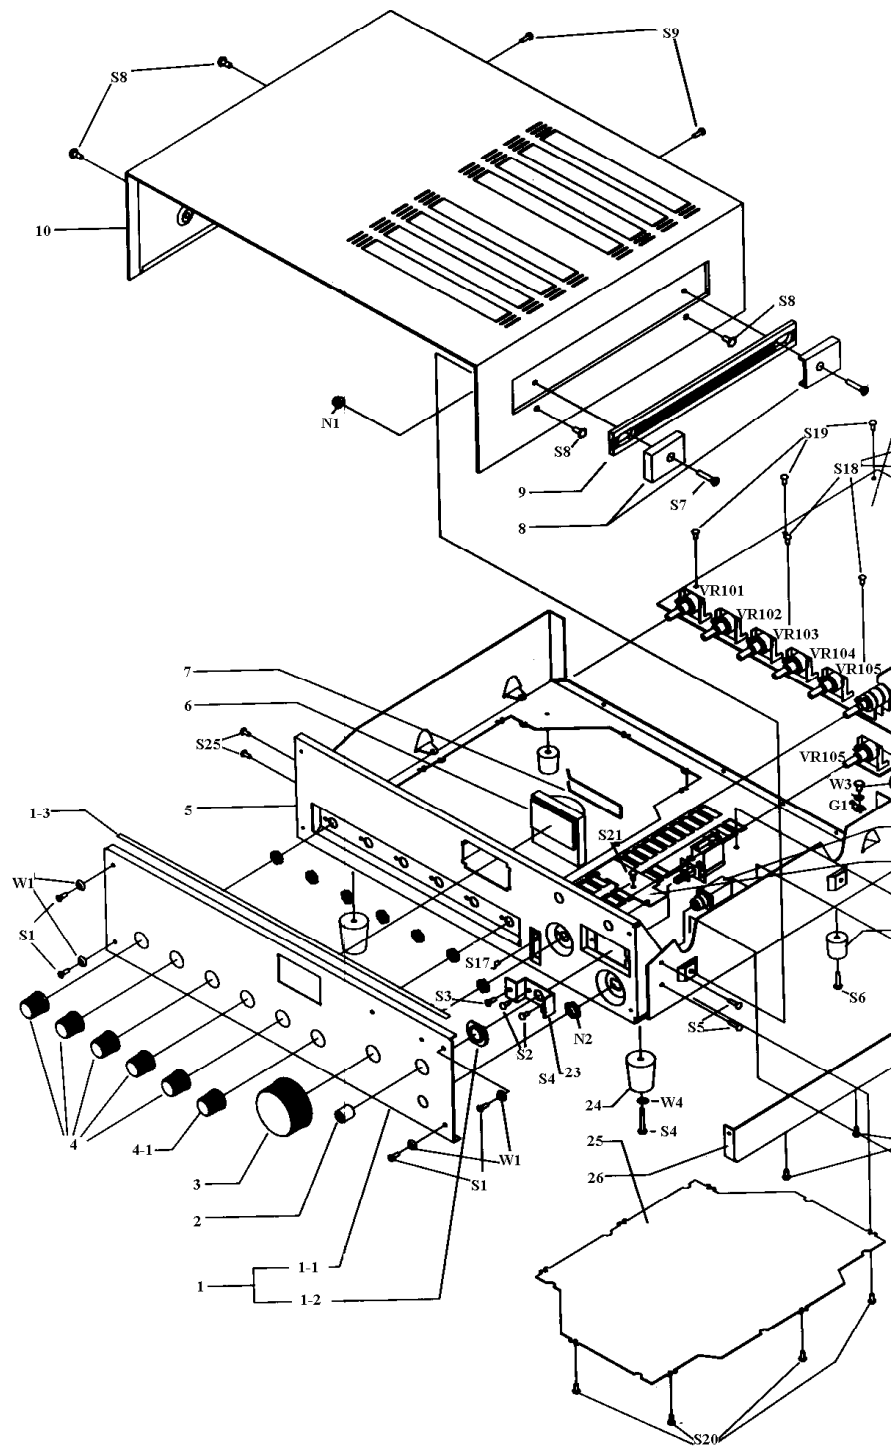

This exploded view diagram illustrates the assembly of a radio receiver chassis. The main components and their callout numbers are as follows:

- Chassis (11):** The central metal frame.
- Tuning Eye (12):** Located at the top right of the chassis.
- Variable Capacitors (VR103, VR104, VR105):** Positioned on the left side.
- Coils (XLR001, XLR002, XLR003, XLR004):** Located near the variable capacitors.
- Resistors (P1, P2, P3, P4, P5, P6):** Various resistors are shown in their respective positions.
- Switches (SW101, SW102):** Located in the center of the chassis.
- Connectors (PJ102, PJ103, PJ104, PJ105):** Positioned near the top left.
- Other Components:** S10, S11, S12, S13, S14, S15, S16, S17, S18, S19, S20, S21, S22, S23, S24, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34, S35, S36, S37, S38, S39, S40, S41, S42, S43, S44, S45, S46, S47, S48, S49, S50, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, S62, S63, S64, S65, S66, S67, S68, S69, S70, S71, S72, S73, S74, S75, S76, S77, S78, S79, S80, S81, S82, S83, S84, S85, S86, S87, S88, S89, S90, S91, S92, S93, S94, S95, S96, S97, S98, S99, S100.